

STRAINER

Threaded bronze NP 20

Art. 006.0740

Execution: cast bronze body according to BS 1400 normatives Lg2 (Cu85/Sn5/Zn5/Pb5) hot printed cap from brass bar Cu Zn40 Pb2 - wire filter for sizes from 3/8" to 2" in stainless steel 18/8, filtering holes diameter 0.65 mm, for sizes 3" and 4" holes diameter 0.75 ÷ 0.80 mm - gasket NA 1030 Gr. asbestos free max temperature 180°C - threaded female ends BS 2779 normatives

Diameters: 3/8" ÷ 4"

Max pressure 20 bar

Max temperature 180°C

Body test pressure 30 bar

Seat test pressure 22 bar



Employments: heating plants - water plants - sanitary compressed air - gas distribution network - oils - petrol - steam.

Sizes

Ř	B	C	D	CH1	CH2	Weight Gr.
3/8"	38	56	11	23	18	190
1/2"	40	59	11	28	18	230
3/4"	46	67	12	34	22	315
1	58	76	14	42	28	480
1L	70	92	15	52	34	765
1"	80	100	15	56	39	935
2"	100	125	18	70	55	1710
2"	115	147	21	88	65	2750
3"	135	175	24	103	75	4235
4"	167	217	24	129	85	7040

LEGEND:


- 1= BODY
- 2= CAP
- 3= GASKET
- 4= FILTER

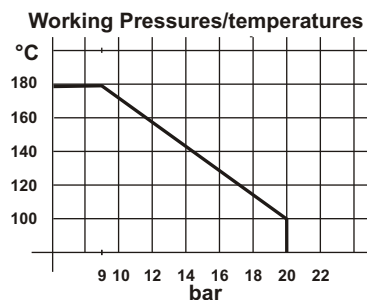


G.OGRINC
katalog strojne
instalacije




Art. 006.0740

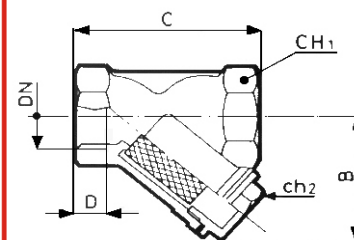

Sec.Art. 006.0740



Sec.Art. 006.0740



G.OGRINC d.o.o.

Tel. 01 361 50 44, Fax. 01 361 16 00, e-pošta. gogrinc@siol.net, spletna stran. www.g-ogrinc.si

