

# THREADED BALL VALVE

## Stainless steel full bore NP 25/140

Art. 037.7210

**Execution:** body, sleeve, ball and pivot AISI 316 stainless steel - PTFE ball gasket, gasket, pivot washer and pivot gasket - PVC covered steel lever - viton O-Ring - full bore valve - female sleeve thread connections ISO 7/1.


**Diameters:** 1/8" ÷ 4"

Working pressure 25 bar ÷ 140 bar


Working temperature -20°C +160°C

**Employments:** industrial plants.

**On request:** particular seals - butt welding or socket welding ends - installation of pneumatic actuator simple or double effect (see chapter "L") - electric motorization.



G.OGRINC  
katalog strojne  
instalacije


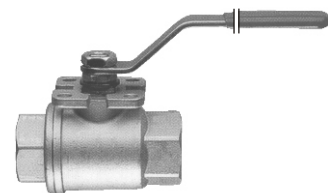


Art. 037.7210


### Sizes

Ř	I	L	H	R	P	A	E	F	Z	KV	NP
1/8"	7.4	55.5	30	110.5	50	35	8	5	-	5	140
1/4"	11	55.5	30	110.5	50	35	8	5	36	5.4	140
3/8"	11.4	55.5	30	110.5	50	53	8	5	36	6	140
1/2"	15	66	36	110.5	53	38	8	5	36	16.3	140
3/4"	16.3	79	45	131.5	68	51	10	7	42	29.5	105
1"	19.1	93	54	175	76.8	60	12	8	42	43	105
1 1/4"	21.4	100	64	175	83	64.5	12	8	42	89	64
1 1/2"	21.4	110	80	250	100	78	16	10	50	230	64
2"	25.7	131	95	250	107.5	84.5	16	10	50	265	64
2 1/2"	30.2	159	122	321.5	127	104	20	14	64	540	25
3"	33.3	185	144	321.5	137.5	114	20	14	64	873	25
4"	39.3	217	177	381.5	156.5	137	24	18	92	1390	25

Chart

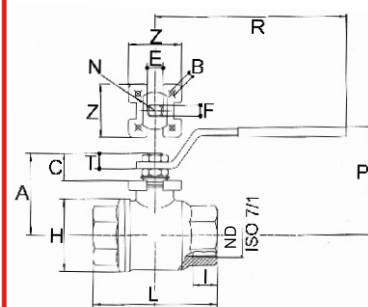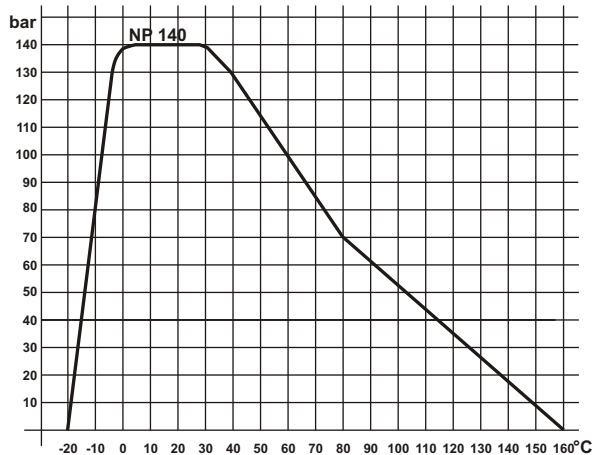

Sec.Art. 037.7210



G.OGRINC d.o.o.

Tel.01 361 50 44, Fax.01 361 16 00, e-pošta.gogrinc@siol.net, splet.www.g-ogrinc.si

